




Wireless Moisture and Temperature Sensor

Flexible sensor applications

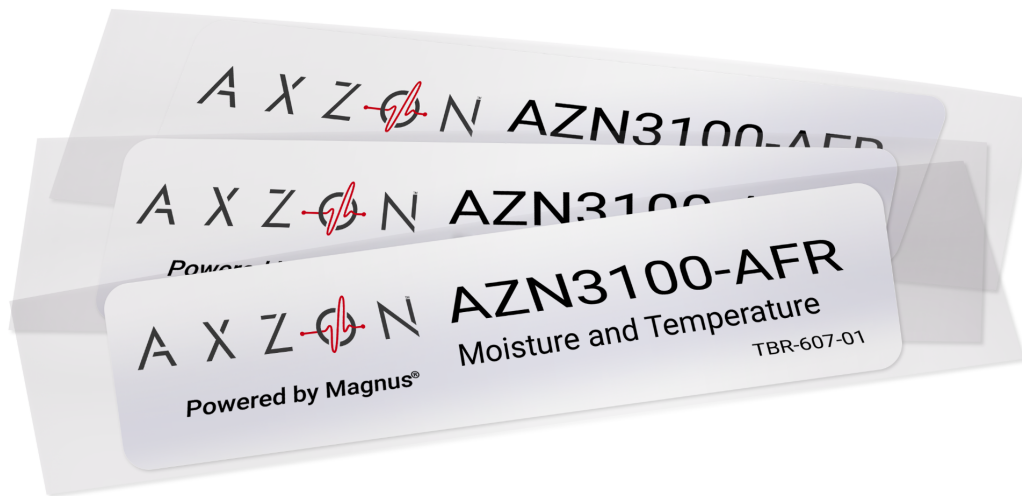

APPLICATIONS

- Moisture monitoring
- Rain monitoring
- Moisture content
- Building materials
- Corrosion prevention
- Temperature monitoring

KEY FEATURES

- Standard temperature range
- 40 °C to +85 °C
- Powered by Magnus® S3
- Flexible sensor design
- Battery-free design
- Sensor size
- 101.7 x 31.9 mm
- Adhesive backing

Battery-free equipment monitoring

The AZN3100 is a wireless battery-free moisture and temperature sensor. This flexible sensor is designed to monitor environmental and material moisture and temperature content over a wide range of settings. This sensor is optimized for direct contact with moisture or water droplets. Typical applications include bulk materials, grain, and food products, as well as building and roofing materials.

Wireless moisture and temperature sensor

The AZN3100 has a standard operating temperature range of -40 °C to +85 °C. This covers the typical operating temperatures of most equipment and environmental operating conditions.

Flexible easy to install design

The AZN3100 is built using flexible materials with a built-in adhesive strip. The AZN3100 incorporates an integrated RF antenna to harvest energy for the moisture sensing function, as well as to communicate with a RAIN/UHF compliant reader. The integrated antenna is configured to be sensitive to moisture and rain but is not suitable for direct use on metal.

Compliance

The AZN3100 is available in FCC and EU/ETSI frequency ranges. The AZN3100 requires a RAIN/UHF compliant reader. These sensors can be purchased separately or as part of a complete system.



代理商联系方式:

样品, 评估板, 参考设计, 报价, 技术支持

电话: 0755-82565851

邮件: dwin100@dwintech.com

手机: 156-2521-4151




网址: <http://www.dwintech.com>

深圳市南频科技有限公司

AZN3100 Performance Data

Flexible sensor for moisture monitoring applications

PARAMETER	VALUE
Normal temperature range	-40 °C to +85 °C
Compatible standards	EPC class 1 gen 2 v2.0.1 ISO 18000-6C
Integrated circuit	Powered by Magnus® S3
TID memory	64-bits
EPC memory	160-bits supporting up to 128-bit EPC
User memory	144-bits
Sensor die cut size	101.7 x 31.9 mm
Sensor pitch	38.1 mm
Web width	127.5 mm
Adhesive	Self-stick with easy release tab
Shipment method	Roll
Minimum order quantity	25 pc MOQ
Ordering information	AZN3100-AFR (FCC 902 to 928 MHz) AZN3100-AER (ETSI 865.6 MHz to 867.6MHz)

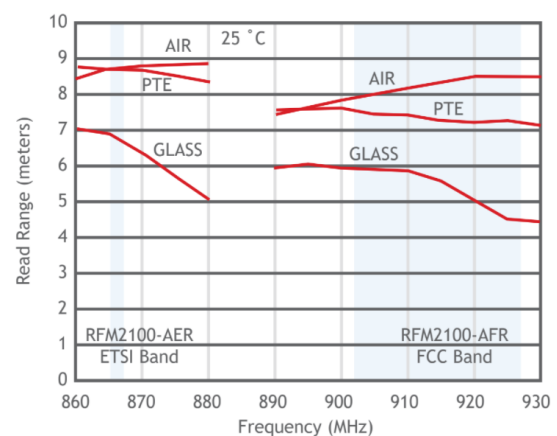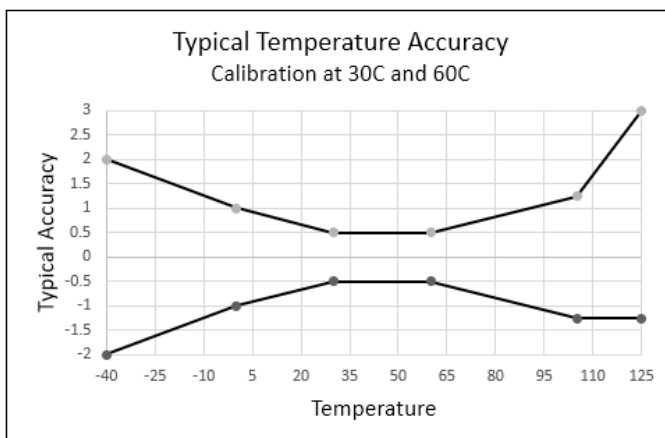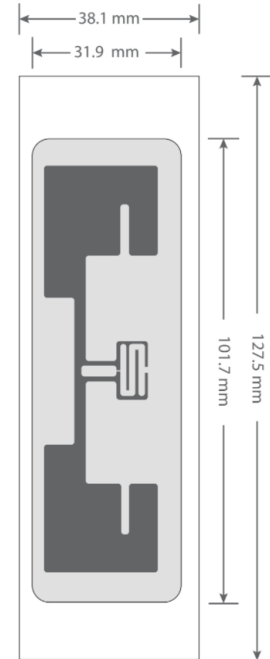

©2021 Axzon, Inc. All rights reserved. Reproduction un part or in whole is prohibited without prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. This product is covered by U.S. patents 7586385, 8081043 and other Axzon's granted and pending patents. Visit the Axzon website (<https://axzon.com/patents/>) for latest patent information. Chameleon™ and Magnus® are trademarks of Axzon, Inc. as well as the product and service names mentioned herein are registered trademarks of Axzon, Inc. All other trademarks are the property of their respective owners, Axzon, Austin Texas, USA.