



Wireless Temperature Sensor

Flexible sensor applications



代理商联系方式:

样品, 评估板, 参考设计, 报价, 技术支持

电话: 0755-82565851

邮件: dwin100@dwintech.com

手机: 156-2521-4151

网址: <http://www.dwintech.com>

深圳市南频科技有限公司



Battery-free equipment monitoring

The AZN3300 is a wireless battery-free temperature sensor. This flexible sensor is designed to monitor environmental and material temperatures in a wide range of settings. Typical applications include environmental temperature monitoring, bulk material temperature monitoring, data center chiller and cooling monitoring, as well as cold chain monitoring at key shipment centers.

APPLICATIONS

Environmental monitoring
Bulk material monitoring
Data center monitoring
Interior temperatures
Equipment monitoring
Point of shipment cold chain

KEY FEATURES

Standard temperature range
-40 °C to +85 °C
Powered by Magnus® S3
Flexible sensor design
Battery-free design
Sensor size
32 x 102 mm
Adhesive backing
Read distance 11m

Wireless temperature sensing

The AZN3300 has a standard operating temperature range of -40 °C to +85 °C. This covers the nominal operating temperatures of most equipment and environmental operating conditions.

Flexible easy to install design

The AZN3300 is built using flexible materials with a built-in adhesive strip. The AZN3300 incorporates an integrated RF antenna to harvest energy for the temperature sensing function, as well as to communicate with a RAIN/UHF compliant reader. The integrated antenna is configured to be relatively insensitive to moisture and rain but is not suitable for direct use on metal.

Compliance




The AZN3300 is available in the FCC frequency ranges. The AZN3300 requires a RAIN/UHF compliant reader.



AZN3300 Performance Data

Flexible temperature sensor for monitoring applications

PARAMETER	VALUE
Normal temperature range	-40 °C to +85 °C
Compatible standards	EPC class 1 gen 2 v2.0.1 ISO 18000-6C
Integrated circuit	Powered by Magnus® S3
TID memory	64 bits
EPC memory	160 bits supporting up to 128 bits EPC
User memory	192 bits supporting up to 128 bits User writable space
Sensor cut size	32 x 102 mm
Sensor pitch	38.1 mm
Web width	111.5 mm
Adhesive	Self-stick with easy release tab
Shipment method	Roll
Minimum order quantity	25 pc MOQ
Ordering information	AZN3300-AFR (FCC 902 to 928 MHz)

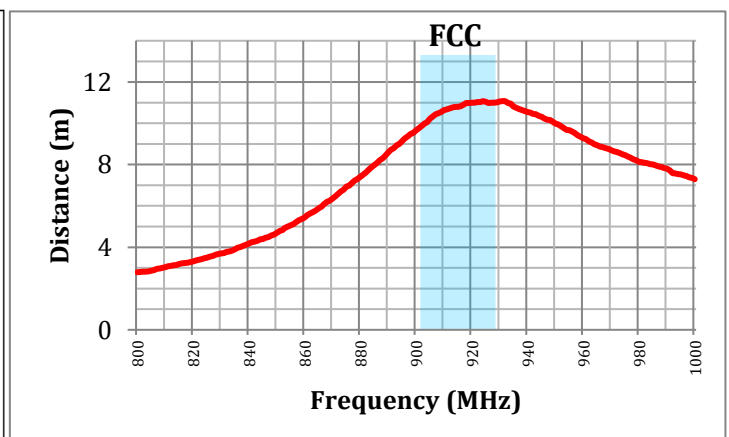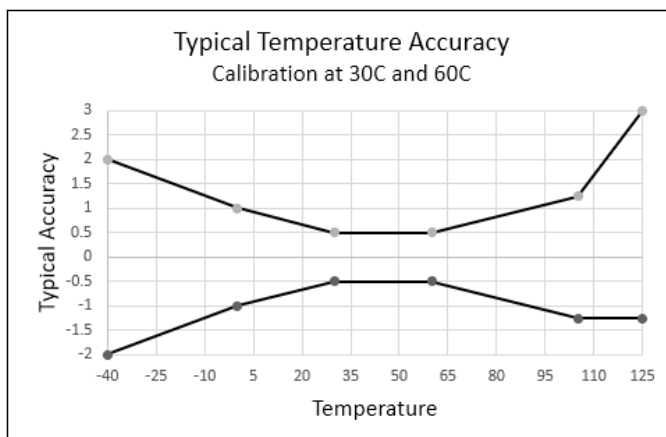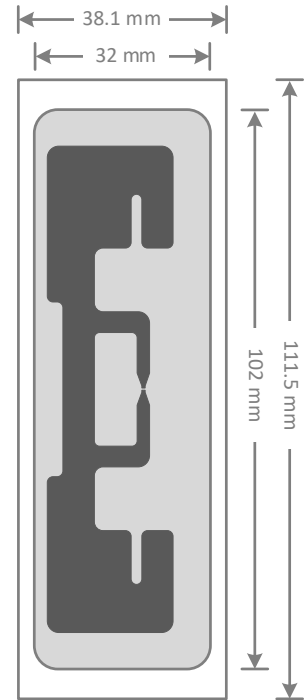

©2023 Axzon, Inc. All rights reserved, Reproduction un part or in whole is prohibited without prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. This product is covered by U.S. patents 7586385, 8081043 and other Axzon's granted and pending patents. Visit the Axzon website (<https://axzon.com/patents/>) for latest patent information. Chameleon™ and Magnus® are trademarks of Axzon, Inc. as well as the product and service names mentioned herein are registered trademarks of Axzon, Inc. All other trademarks are the property of their respective owners, Axzon, Austin Texas, USA.